

## DALJINSKO UPRAVLJANJE



- ✓ Intuitivan izgled
- ✓ LCD Ekran
- ✓ Rezervna baterija
- ✓ Alarm i dijagnostika
- ✓ Opcija samonivelacije stabilizatora

## HIDRAULIČNI KRAK

- ✓ Kuka ili Vitlo do 1T
- ✓ Maksimalna visina 17.3 m
- ✓ Krak u samom kranu,
- ✓ spreman za instalaciju



## POSEBNE POGODNOSTI



- ✓ Varijabilna pumpa promjenljivog kapaciteta
- ✓ 400kg Pick&Carry sa dodatkom virtualnih zidova
- ✓ Samo-dijagnostički sistem
- ✓ Svi alati na jednom mestu

## VITLO



- ✓ Do 125m sajle
- ✓ 800 kg nosivosti sa jednokrakom sajlom
- ✓ Glave i sajla blokovi dostupni na samom kranu

## GLAVNA RUKA



- ✓ Maksimalna nosivost 3.2 Tone
- ✓ Domet 12 m
- ✓ Sastavljena iz 4 lančana segmenta
- ✓ Visokootporan čelik
- ✓ Kuka ili vitlo kao osnovni nastavci

## 360° NEPREKIDNE ROTACIJE


## LITIJUMSKA BATERIJA



- ✓ 48 V, 400 Ah
- ✓ Može raditi tokom punjenja na 220 V
- ✓ Trofazni električni motor od 16 kW,
- ✓ 400 V eksterni punjač baterija

## STABILIZATORI

- ✓ 1250 različitih pozicija
- ✓ 4 nezavisna stabilizatora
- ✓ Samonivelacija




## GUSENICE

- ✓ Crne ili Bele gusenice
- ✓ Hidraulično širenje gusenica do 45°





## TABELA OPTEREĆENJA

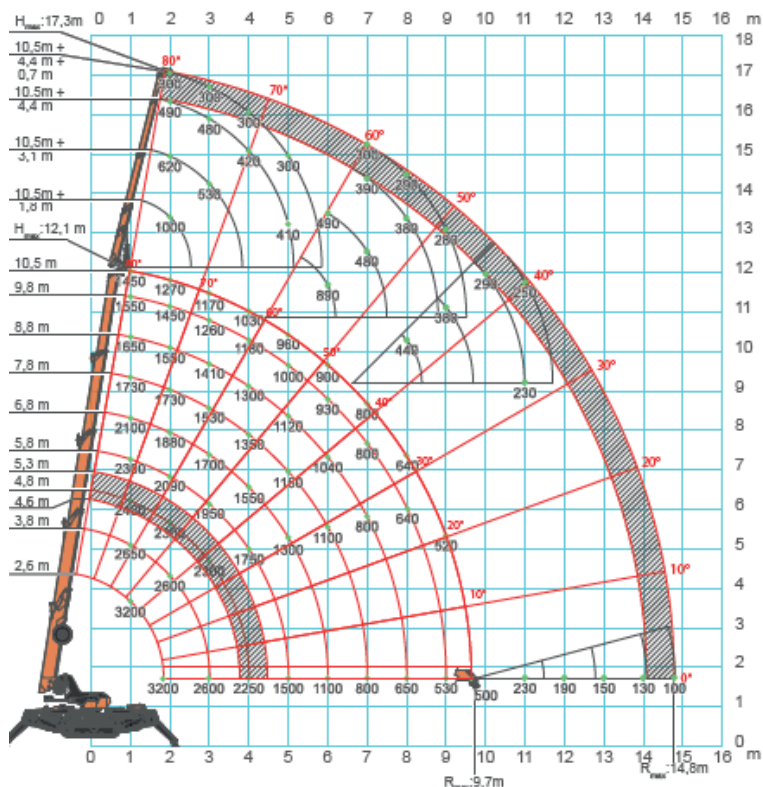

SKENIRAJTE ZA  
VIŠE TEHNIČKIH  
PODATAKA



|                    | Kg   |
|--------------------|------|
| SPX532             | 2520 |
| Hidraulični krak   | 210  |
| Vitlo              | 52   |
| Električni agregat | 63   |




V23.02

Your Jekko Dealer


Jekko s.r.l. @ • Via Campadone, 1 - 31014 Colle Umberto (TV) Italy • infojekko.it • www.jekko-cranes.com  
All specifications and features herein described can be changed without prior advice. All indicated data are indicative only and are not binding as crane performs differently depending on its use.

## DIMENZIJE (mm)

JEDNOKRILNA  
VRATA

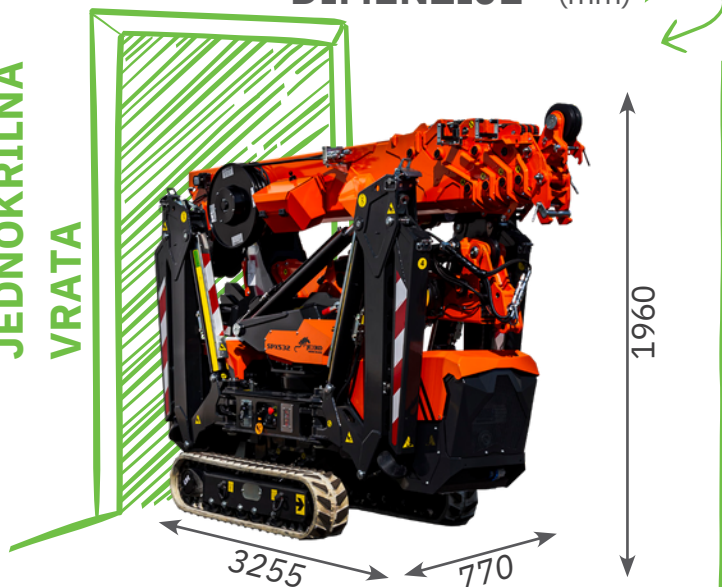

## STABILIZATORI

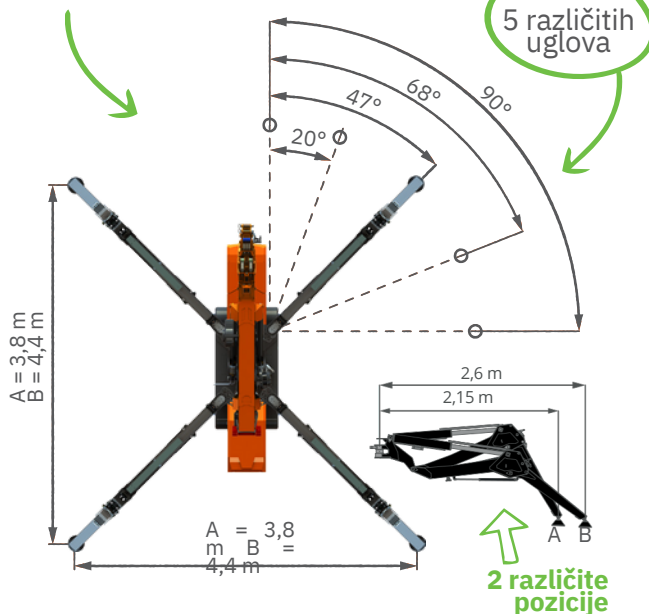


## DODACI

**JVM800-R**  
800 kg Manipulator Stakla



**JIB500GR**  
500 kg klešta za  
čelik i cevi

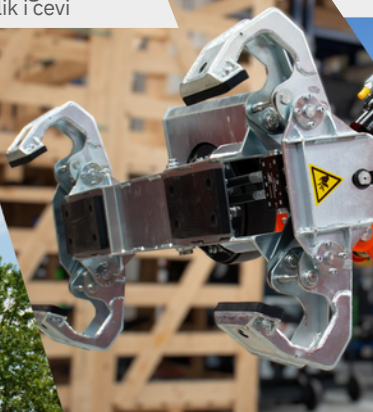

**1,2 T**  
manuelni krak



**1 T**  
Hidraulični  
krak

